


Product Data Sheet PPS-0151

Rev 0 09/07/2018

Double Hot Face Firetex Single Sided Wrap Around A0 / H0 Rated Pipe Penetration Seals

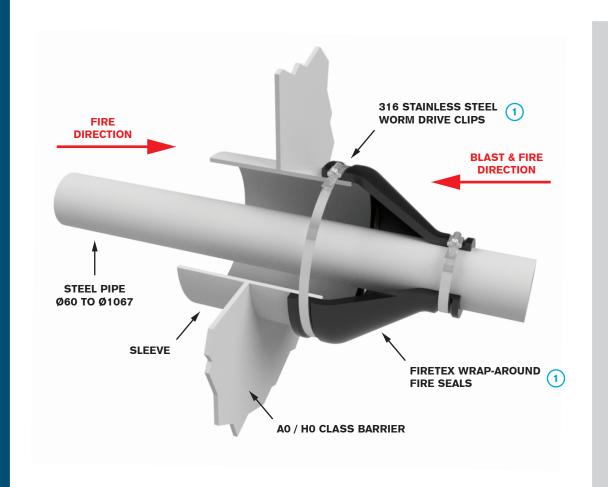

www.mclunitex.com

1 PROVIDED BY MCL UNITEX LTD.

Specification

Certification: A0 and H0 Lloyds Register of Shipping, Certificate No. SAS F150134/M1. Blast over-pressure to

1.35 bar g, Lloyds Register of Shipping Certificate No. LWT 401087/1.

Movement: Standard seal construction will accommodate +/- 25mm in any plane.

Installation: Each seal is supplied with installation instructions, sealant and stainless steel worm drive clips.

Location: Seals to be installed on one side of the barrier.